

Product Highlights

Complete Internet Solution

A total solution that helps you connect, share, and enjoy your Internet connection with a single device that's easy to set up and manage

Wireless AC and Gigabit Ethernet

Stream HD multimedia across your home without interruption using the fastest wired and wireless technologies available today

Simple Setup

Set up the DSL-G2452DG in no time with the web-based setup wizard, and create wireless connections easily using Wi-Fi Protected Setup (WPS)



DSL-G2452DG

VDSL2 Wireless AC1200 4-Port Gigabit Modem Router

Features

Connectivity

- Supports multiple WAN connections for flexibility, redundancy, and future connectivity
- Built-in ADSL2+/VDSL2 modem for connecting to your high-speed broadband Internet connection
- Gigabit WAN port supports high-speed Internet connections of today and tomorrow
- Four Gigabit LAN ports to connect wired devices for high-speed online activities
- Fast 802.11ac wireless for high-speed connections to all of your PCs and mobile devices
- SuperSpeed USB 3.0 port to share media from a storage device or attach a 3G/4G mobile wireless networking device

Security

- Wi-Fi Protected Setup (WPS) to quickly add devices to your network
- WPA/WPA2 encryption

Ease of Use

Quick Setup Wizard

The DSL-G2452DG VDSL2 Wireless AC1200 4-Port Gigabit Modem Router is a highly integrated router with everything your home or small business needs for high-speed Internet access. It combines an ADSL2+/VDSL2 modem, Gigabit Ethernet Internet Port, 4G mobile Internet support, and Gigabit wireless together in a single, easy-to-use product that shares an Internet connection for all your devices.

Fast and Reliable Home Network

The D-Link DSL-G2452DG VDSL2 Wireless AC1200 4-Port Gigabit Modem Router creates a blazing fast home network that connects all of your devices to your broadband Internet connection. Concurrent dual-band 802.11ac brings you the future of high-bandwidth wireless connectivity, allowing you to stream HD video, and surf the Internet from every corner of your home without interruption. Gigabit Ethernet ports provide high-speed wired connections for up to four PCs or other devices. It's stylish, easy to use, and provides you with a reliable network for today and tomorrow.

Multiple Failover Redundancy and Future Connectivity

The D-Link DSL-G2452DG VDSL2 Wireless AC1200 4-Port Gigabit Modem Router comes not only with a built-in high-speed VDSL/ADSL modem, capable of up to 100 Mbps VDSL/24 Mbps ADSL speeds, but is also equipped with a Gigabit Ethernet WAN port, and two USB ports which support 3G/4G mobile broadband adapters. This means that if your primary connection method should fail, the DSL-G2452DG will automatically fall back to your predefined backup connection.

Smooth Streaming with Wireless AC

The DSL-G2452DG uses the latest Wireless AC technology, which provides transfer rates of up to 1.2 Gbps¹ (866 AC + 300 N). The router operates on both the 2.4 GHz and 5 GHz wireless bands at the same time using concurrent dual-band technology and two external antennas.



VDSL2 Wireless AC1200 4-Port Gigabit Modem Router

This allows you to browse the web, chat, and e-mail using the 2.4 GHz band, while simultaneously streaming digital media, playing online games, or making Internet voice calls on the 5 GHz band.

Designed for Optimal Wireless Coverage

The DSL-G2452DG's antennas have been carefully designed to ensure that you will get little to no dead space in any environment. The high-powered amplifier sends the signal into the farthest corners of your home, while high-gain antennas extend the maximum range of wireless signals. Furthermore, the DSL-G2452DGs multiple external antennas improve wireless reception by bringing signals to where they are most needed to achieve the best possible performance.


File Sharing Right at Your Fingertips

The DSL-G2452DG lets you connect a USB storage device and instantly share documents, movies, pictures, and music. You can put your music library on a USB drive and share it with your entire home. You can show photos on the living room TV while a family member watches a movie on their computer. You can stream media files to multiple devices without interruption, or save them to your device for offline playback. The intuitive interface lets anyone immediately connect to a variety of entertainment options stored on your own storage device.

Easy to Set Up

Setting up the DSL-G2452DG is easy with the D-Link easy setup wizard. Simply open the setup utility and follow a few easy steps to get your home network up and running. You can also set up a WPA2 encrypted network with the touch of a button using Wi-Fi Protected Setup (WPS). Simply press the respective WPS buttons on each devices to instantly establish an encrypted connection to a new device. Your network will be encrypted with WPA/WPA2 wireless encryption and employ built-in dual active firewalls (SPI and NAT) to help protect your network from unauthorized access.

Back View

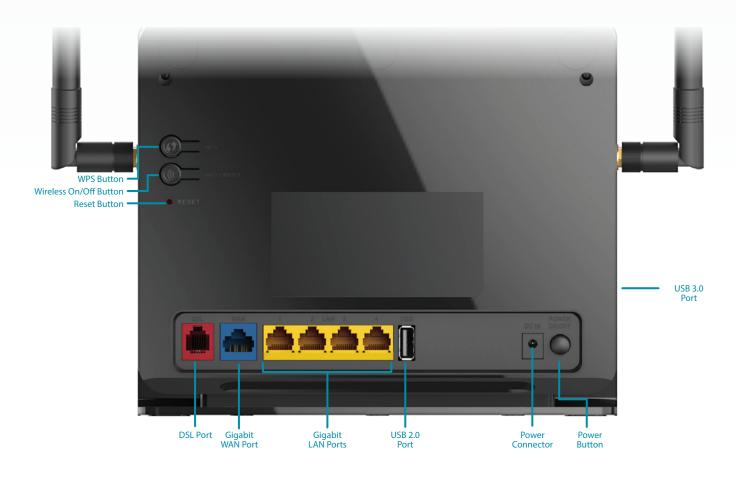



VDSL2 Wireless AC1200 4-Port Gigabit Modem Router

Technical Specifications General		
Antenna Configuration	Two high-gain Removable Dual-Band Antennas	
Maximum Wi-Fi Speed	• 2.4 GHz • 300 Mbps ¹	• 5 GHz • 866 Mbps ¹
Standards	• IEEE 802.11ac • IEEE 802.11n • IEEE 802.11g • IEEE 802.11b • IEEE 802.3i	IEEE 802.3u IEEE 802.3ab IEEE 802.3az Energy Efficient Ethernet IEEE 802.3x Flow Control
Minimum System Requirements	 Windows 8/7/Vista/XP or Mac OS X 10.3 or higher Microsoft Internet Explorer 9, Firefox 23, Chrome 28, Safari 7, or higher or other Java-enabled browser 	Ethernet or Wireless Network Interface Subscription with an Internet Service Provider (ISP)
ADSL Features	• T1.413i2, G.992.1 • G.dmt, G.992.2, G.lite • G.992.3 (G.bis/ADSL2)	• G.992.5 (ADSL2+) • ITU G.994.1 (G.hs) • Annex L (Reach Extended ADSL2)
VDSL Features	 ITU-T G.993.2 VDSL2 Supports 8a, 8b, 12a, 12b, 17a, 30a profiles Supports G.vector Supports ATM and PTM Supports G.INP 	 Supports ATM forum UNI3.0, 3.1 and 4.0 permanent virtual circuits (PVCs) Supports CBR, UBR, VBR-rt, VBR-nrt Supports multiple PVCs Supports ITU-T i.610F4/F5 OAM
Network Protocols	RFC2684 multiprotocol Encapsulation over ATM Adaptation Layer 5 RFC1483 multiprotocol Encapsulation over ATM Adaptation Layer 5 RFC2364 PPP over ATM ALL5 (PPPoA) RFC2516 PPP over Ethernet (PPPoE) RFC1662 PPP in HDLC-like Framing RFC1332 PPP Internet Protocol Control Protocol	 RFC1577/2225 Classical IP and ARP over ATM (IPoA) RFC894 A Standard for the Transmission of IP Datagrams over Ethernet Networks RFC1042 A standard for the Transmission of IP Datagrams over IEEE 802 Networks MER (a.k.a IP over Ethernet over AAL5) Support ALG (Application Level Gateways)
Functionality		
Security	WPA & WPA2 (Wi-Fi Protected Access)	Wi-Fi Protected Setup (WPS) - PIN/PBC
Advanced Features	Multi-language Web Setup Wizard UPnP support Multiple PVC (up to 8)	 Dual Active Firewall VPN pass-through/multi-session PPTP/L2TP/IPSec 802.1p QoS (Quality of Service)
Routing Features	RFC768 User Datagram Protocol (UDP) RFC791 Internet Protocol (IP) RFC792 Internet Control Message Protocol (ICMP) RFC793 Transmission Control Protocol (TCP) RFC826 An Ethernet Address Resolution Protocol (ARP) RFC862 Echo Protocol Support IP routing Support transparent bridging	 Support source and destination routing Support DHCP server/client Support UPnP Support NAT,NAPT Support DMZ Support IP QoS Support IGMP proxy Support IPv6
Management Features	Device Configuration, Management and Update Web based GUI Command Line Interface via telnet, or SSH Universal Plug and Play (UPnP) Internet Gateway Device (IGDv1.0)	WAN Management Protocol (TR-069) SNMP v1/v2 PSI configuration file upload and download Date/time update from SNTP Internet Time Server

VDSL2 Wireless AC1200 4-Port Gigabit Modem Router

Physical		
Dimensions	• 210 x 150 x 37 mm (8.26 x 5.91 x 1.46 inches)	
Weight	• 475.7 grams (1.05 pounds)	
Power	• Input: 100 ~ 240 V	• Output: 12 V / 2A
Temperature	• Operating: 0 to 45 °C (32 to 113 °F)	• Storage: -20 to 70 °C (-4 to 158 °F)
Humidity	• 10 % to 95 % non-condensing	
Certifications	• CE	• LVD
Order Information		
Part Number	Description	
DSL-G2452DG	VDSL2 Wireless AC1200 4-Port Gigabit Modem Router	

¹ Maximum wireless signal rate derived from IEEE Standard 802.11ac, 802.11a, 802.11b, specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range. Wireless range and speed rates are D-Link relative performance measurements based on the wireless range and speed rates of a standard Wireless G product from D-Link. Maximum throughput based on D-Link 802.11ac devices.

Updated 2021/01/05

