



— DWL-P50

5VDC/12VDC Power Over Ethernet Adapter

The DWL-P50 Power over Ethernet adapter is a single-port injector that provides DC power for a non-PoE-equipped device, such as a surveillance camera or a wireless access point. It is designed to operate with LAN switches and other equipment that support industry-standard 802.3af Power over Ethernet (PoE) to deliver operation power to the networked device, allowing you to install the device at places such as on a rooftop or near a ceiling, where power is not easily accessible. The DWL-P50 supports both 5VDC and 12VDC power and can be flexibly deployed with network devices with different power voltage requirements.

Facilitates Installation

The DWL-P50 is useful for installation at a factory or Wi-Fi™ hot spot. This compact adapter allows you to install your surveillance cameras and wireless LAN devices on a building rooftop, on or near a ceiling for maximum coverage. Your cameras or wireless access points can be placed up to 100 meters away from a power source. It is at these places that wall AC outlets are inaccessible and providing power to these locations is difficult and expensive. The DWL-P50 is also handy for installation at offices with Internet telephones connected to a PoE Ethernet switch. It eliminates the need to individually power each IP phone. By transmitting remote power through the standard network cabling, the DWL-P50 does away with the need for an AC outlet at each device location. Only a single Ethernet cable is run to each device instead of separate power and data cables.

Data and DC Power Transmission on the Same Network Cable

On a standard 4-wire UTP Category 5 cable, only two pairs (pins 1, 2, 3 and 6) are used for Ethernet data transfer. At one end, your PoE Ethernet switch inserts DC voltage into the unused wires, taking advantage of the unused pair of the network cable wires. At the other end, the DWL-P50 taps

the DC power from the Ethernet cable for use by the non-PoE device. Consequently, a single Category 5 cable can now carry both Ethernet data and DC power. The idea is to supply the remote end with power and Ethernet connectivity via a single network cable.

Centralized Power Provision, Easy Deployment

In addition to eliminating the need for additional, separate wiring for power, the DWL-P50 is also a useful tool that forms part of your centralized power network installation. A central UPS can be added to the PoE switch, to which all your wireless access points, surveillance cameras and Internet phones are connected. This installation provides uninterrupted power without the need to deploy a separate UPS for each device.

Very Compact Size, Simple Installation

The DWL-P50 is very small in size and lightweight and requires no configuration setting. It is designed for quick and easy deployment, and can be hooked with a simple plug to a network device placed on a high wall or ceiling. This PoE adapter supports both 5V and 12V DC output, allowing you to deploy it with a variety of devices with different power requirements. A built-in slide switch allows you select the required power output.

Key Features

- Provides DC power over existing Category 5 cable to wireless LAN device
- Cuts costs and provides convenience
- Transforms incoming AC power into low-voltage DC power
- Protects wireless LAN device from possible power-surges
- Supports both 5VDC and 12VDC power (selectable through a slide switch)
- Very compact size, lightweight
- Complete plug-and-play installation, no configuration setting or installation tool required
- No software required, O.S.-independent

DWL-P50

Technical Specifications

Power Over Ethernet

Output Voltage

- Input: 48VDC, 400mA
- Output: 5VDC (11.5 watts) or 12VDC (12 watts) (slide switch selectable)

Ethernet Cable

- TIA/EIA 568 Cat. 5
- Connector: RJ-45

Diagnostic LED

Power

Dimensions

80.9 x 52 x 28 mm (adapter only)

Weight

80 grams (adapter only)

Operating Temperature

0° to 40 °C (32° to 104 °F)

Storage Temperature

-40° to 70 °C (-40° to 158 °F)

Operating Humidity

10% to 80% RH

Storage Humidity

5% to 90% RH

EMI


- FCC Part 15 Class B
- CE Class B

Safety

- UL
- TUV

Box Includes

- DWL-P50 PoE adapter
- Quick Installation Guide
- 1.8m Ethernet cable
- 80-cm DC power cable with female power connectors

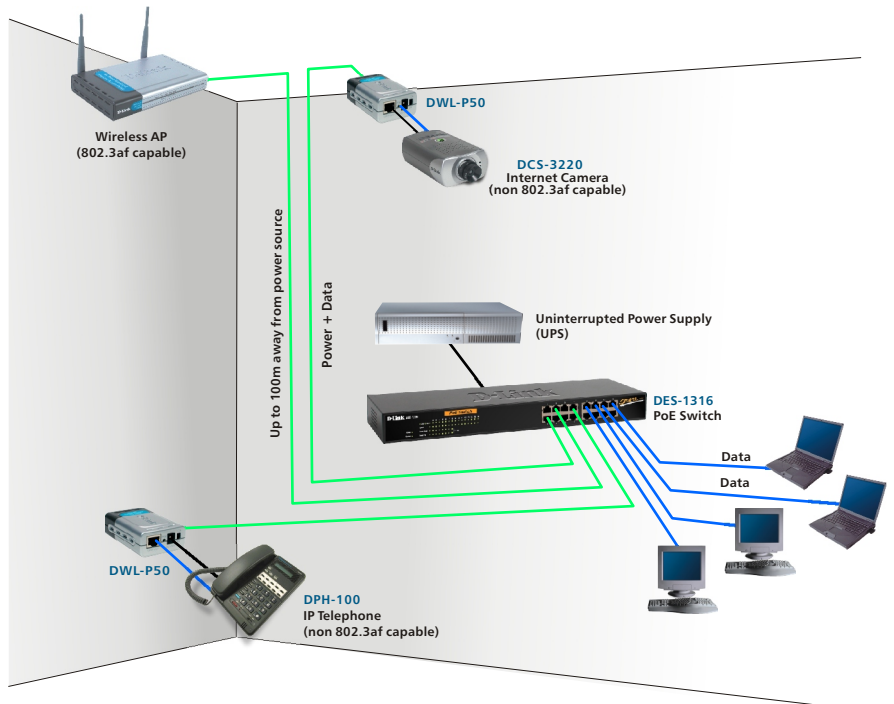

LISTED
ITE
E141136
66F9

Ordering Information

DWL-P50
DES-1316

Power Over Ethernet Adapter
16-Port 802.3af standard Power Over
Ethernet Switch



Specifications subject to change without prior notice.
D-Link is a registered trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

U.S.A

Canada

Europe

Germany

France

Netherlands

Belgium

Italy

Iberia

Sweden

Norway

Denmark

Finland

Singapore

Australia

Japan

China

India

Middle East (Dubai)

Turkey

Egypt

Israel

Latin America

Brasil

South Africa

Russia

Taiwan

D-Link Corp.

TEL: 1-714-885-6000

TEL: 1-905-8295033

TEL: 44-20-8731-5555

TEL: 49-6196-77990

TEL: 33-1-30238688

TEL: 31-10-282-1445

TEL: 32(0)2-517-7111

TEL: 39-2-2900-0676

TEL: 34-93-4090770

TEL: 46-(0)8564-61900

TEL: 47-22-309075

TEL: 45-43-969040

TEL: 358-9-2707-5080

TEL: 65-6774-6233

TEL: 61-2-8899-1800

TEL: 81-3-5434-9678

TEL: 86-10-8518-2533

TEL: 91-022-652-6696

TEL: 9714-8834234

TEL: 90-212-335-2553

TEL: 202-414-4295

TEL: 972-9-9715700

TEL: 56-2-232-3185

TEL: 55-11-55039320

TEL: 27(0)1266-52165

TEL: 7-095-744-0099

TEL: 886-2-2910-2626

TEL: 886-2-2916-1600

FAX: 1-866-743-4905

FAX: 1-905-8295223

FAX: 44-20-8731-5511

FAX: 49-6196-7799300

FAX: 33-1-30238689

FAX: 31-10-282-1331

FAX: 32(0)2-517-6500

FAX: 39-2-2900-1723

FAX: 34-93-4910795

FAX: 46-(0)8564-61901

FAX: 47-22-309085

FAX: 45-43-424347

FAX: 358-9-2707-5081

FAX: 65-6774-6322

FAX: 61-2-8899-1868

FAX: 81-3-5434-9868

FAX: 86-10-8518-2250

FAX: 91-022-652-8914

FAX: 9714-8834394

FAX: 90-212-335-2500

FAX: 202-415-6704

FAX: 972-9-9715601

FAX: 56-2-232-0923

FAX: 55-11-55039321

FAX: 27(0)1266-52186

FAX: 7-095-744-0099#350

FAX: 886-2-2910-1515

FAX: 886-2-2914-6299



RECYCLABLE

Rev. 01 (Aug. 2004)