

# D-Link

## Quick Installation Guide

This product can be set up using Internet Explorer 5.x or later

**DCS-2000**  
Home Security  
Internet Camera



## Before You Begin

You must have at least the following:

- Windows XP/2000/ME/98SE
- Ethernet Adapter
- CD-ROM Drive

## Check Your Package Contents

These are the items included with your purchase:

If any of the below items are missing, please contact your reseller.



**DCS-2000** Internet Camera



Installation CD (containing Drivers, Software, Quick Installation Guide and Manual)



Camera Stand and Bracket



Category 5 Ethernet Cable



AC Power Adapter



Using a power supply with a different voltage rating will damage this product and void the warranty.

# System Requirements

- Internet Explorer 5.x or above
- CPU: Pentium III, 500 MHz or above (Required for use with **IP Surveillance** software)
- Memory Size: 64 MB (128 MB recommended)
- VGA card resolution: 800x600 or above

## 1

## Hardware Installation

### Connect the Ethernet Cable

Connect an Ethernet cable to the Ethernet connector located on the Internet Camera's back panel and attach it to the network.



If you connect this camera directly to a PC, you will need a cross-over Ethernet cable. If you plug the camera into a hub or router, you will be able to use the cable included with your camera.

### Attach the External Power Supply

Attach the external power supply to the DC power input connector located on the Internet Camera's back panel (labeled DC 12V) and connect it to an AC power outlet.



Power source is confirmed when the LED Power Indicator on the Internet Camera is illuminated.


When you have a proper connection, the LED (Light Emitting Diode) will turn from red to green. The light may blink on and off and your computer may show an intermittent loss of connectivity, this is normal until you have configured your camera.

# 2

## Configuring your camera with IP Installer

Insert the **DCS-2000** CD into the CD-ROM drive.

Click on **IP Installer**

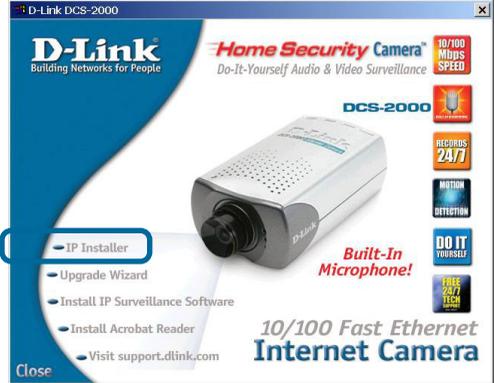


This is the first screen that will appear.



# 2

## Configuring your camera with IP Installer (continued)

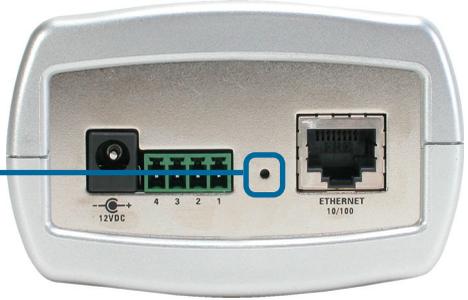

In the back of the camera, there is a hole for reset. Lightly insert a paper clip into the reset hole until the light starts to cycle (a series of blinks) twice, then let go.



The IP Installer will now show a MAC address of the **DCS-2000** and an IP Address (which may or may not be correct depending on what you have your **DCS-2000** connected to.) If you have a DHCP\* server on your network, there will be a valid IP Address displayed here.



A DHCP server is a device that supplies IP Addresses to its clients that are on the same network


Highlight the MAC address

Click on the **Wizard** button



# 2


## Configuring your camera with IP Installer (continued)

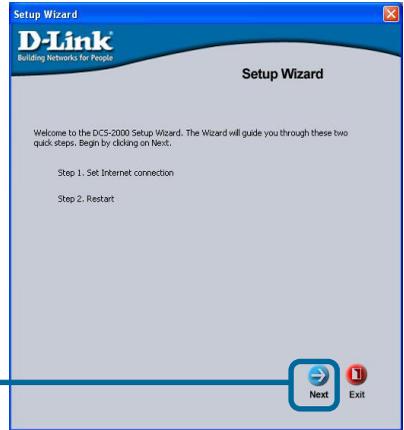

Click **Next**


If you have a DHCP server on your network, you will already have a valid IP Address in these fields.

If you do not have a DHCP server on your network fill out your **IP Address**, **Subnet Mask**, **Gateway** and at least 1 **DNS** IP Address respectively on this page. If you do not know what to put in these fields, please contact your System Administrator or your Internet Service Provider.

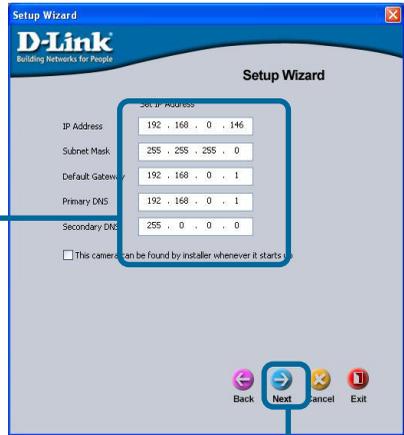

Click **Next**

If you need to change your network settings at this point click **Back**. To accept the settings, click **Restart**.

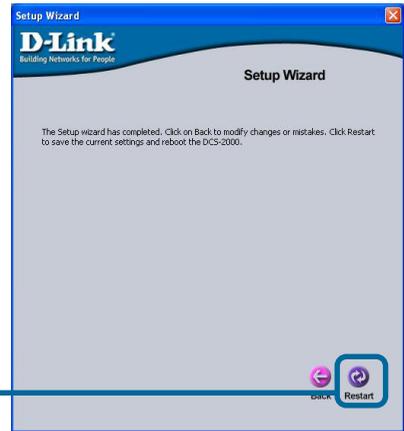

# 2

## Configuring your camera with IP Installer (continued)



Click **OK**

The **DCS-2000** will reboot to accept the settings.

This page will now show the IP Address assigned to the MAC address of the **DCS-2000**.



Click **Link**

# 3


## Viewing Your Internet Camera

After you click on the **Link** button, **IP Installer** will automatically open your Internet browser to the IP Address of the **DCS-2000**, in this example it is: `http://192.168.0.146`. Your **DCS-2000** may have a different IP Address.



At this point we highly recommend that you click on **Tools** and then **Administrator** and put in a password for security purposes.

Enter the administrative password. Click **Save** then "**X**" at top right-hand corner of your Browser to close the page.

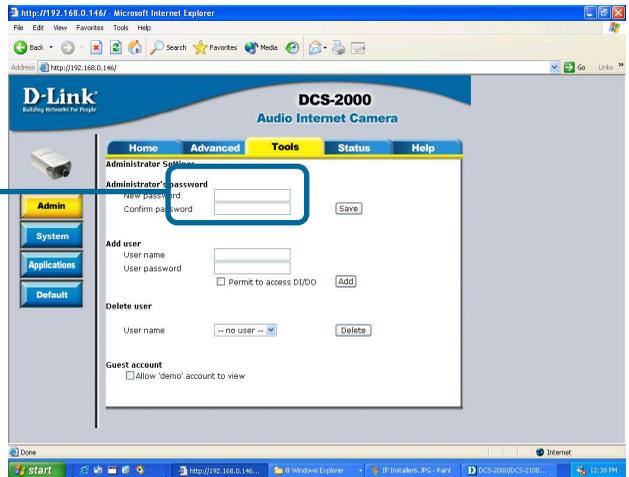

The installation and configuration of the **DCS-2000** Internet Camera is now complete.

# Technical Support

You can find software updates and user documentation on the D-Link website.

D-Link provides free technical support for customers within the United States and within Canada for the duration of the warranty period on this product.

U.S. and Canadian customers can contact D-Link Technical Support through our website, or by phone.

## Tech Support for customers within the United States:

### ***D-Link Technical Support over the Telephone:***

(877) 453-5465

24 hours a day, seven days a week.

### ***D-Link Technical Support over the Internet:***

<http://support.dlink.com>

[email:support@dlink.com](mailto:support@dlink.com)

## Tech Support for customers within Canada:

### ***D-Link Technical Support over the Telephone:***

(800) 361-5265

Monday to Friday 8:30am to 9:00pm EST

### ***D-Link Technical Support over the Internet:***

<http://support.dlink.ca>

[email:support@dlink.ca](mailto:support@dlink.ca)

**D-Link<sup>®</sup>**  
**Building Networks for People**